

City of Oregon City
15th Street Waterline Replacement
CI 15-011

ADDENDUM NO. 1
Issued: May 23, 2016

To All Contract Document Holders:

You are hereby notified of the following changes, deletions, additions, corrections, and clarifications to the plans, specifications, and other documents comprising the contract documents for the City of Oregon City, 15th Street Waterline Replacement Project (CI 15-011).

The following formatting has been used to note additions and deletions to the contract documents:

- Deletions are formatted as stricken-through (~~example~~) text.
- Changes/additions are formatted as bolded (**example**) text.

Clarifications

1. The bid opening falls after the Memorial Day holiday. Will the bid opening be postponed to account for the holiday and allow more time for preparation of bids?

The bid opening, originally set for May 31, 2016, at 2:00 PM, will be postponed due to the Memorial Day holiday. The new bid opening will take place on **June 2, 2016, at 11:00 AM local time**. The contract documents are herein amended.

2. Will bypass pumping be required for replacement of the sewer? If so, what are the typical flows expected for sizing of bypass pump?

Yes, bypass pumping will be required for replacement of the 15-inch sewer. The contractor is to submit a bypass pumping plan. Based on field measured flow depth, pipe slope, and pipe material, the dry-weather flow is expected to be approximately 350 gallons per minute (gpm).

3. Is inspection of the water service Pressure Reducing Valve (PRV) included with the Plumbing Permits? What are the Plumbing Permit fees?

Yes, inspection of the water service connection will include the PRV. The Plumbing Permit application and associated fees can be found on the City of Oregon City website at <http://www.orcity.org/building/building-division-application-forms-and-informational-documents>.

Contract Documents

1. Invitation to Bid

- (a) Revise the first paragraph of the Invitation to Bid that currently reads:

Sealed bids for furnishing all materials, equipment, labor, and services for the construction of the 15th Street Waterline Replacement Project for the City of Oregon City (City), Oregon will be received by John M. Lewis, P.E., Public Works Department, 625 Center Street, Oregon City, Oregon, until 2:00 PM local time on May 31, 2016.

Bids received after this time will not be considered. All bids received prior to the due date and time will be publicly opened and read on the due date and time in the location bids are received.

To read as follows:

Sealed bids for furnishing all materials, equipment, labor, and services for the construction of the 15th Street Waterline Replacement Project for the City of Oregon City (City), Oregon will be received by John M. Lewis, P.E., Public Works Department, 625 Center Street, Oregon City, Oregon, until **11:00 AM local time on June 2, 2016**. Bids received after this time will not be considered. All bids received prior to the due date and time will be publicly opened and read on the due date and time in the location bids are received.

2. FORM II M: Customer Service Acknowledgement

- (a) Revise the second line that currently reads:

Bid Closing: Date: May 31, 2016 Time: 2:00 PM

To read as follows:

Bid Closing: Date: **June 2, 2016** Time: **11:00 AM**

3. SPECIAL PROVISIONS AND TECHNICAL SPECIFICATIONS: Section 00495.80 – Measurement

- (b) Revise the following section that currently reads:

The maximum allowable pay width limit for temporary trench resurfacing will be five feet. The maximum allowable pay width limit for permanent trench resurfacing shall be as shown on the Plans.

Measurement for temporary trench resurfacing will be the actual area resurfaced.

Replacement of pavement markings and stripping and traffic loops shall be considered incident to surface restoration and separate measurement or payment will be made for this work.

To read as follows:

The maximum allowable pay width limit for temporary trench resurfacing will be five (5) feet. The maximum allowable pay width limit for permanent trench resurfacing shall be as shown on the Plans, **unless wider widths are required by the engineer to repair adjacent deteriorated areas of the street. Measurement shall be based on a permanent pavement depth of four (4) inches. Measurement for depths greater than four (4) inches, required to match existing pavement depths, shall be increased on a prorated volumetric basis.**

Measurement for temporary trench resurfacing will be the actual area resurfaced, **but not to exceed a trench width of five (5) feet, as noted above, unless otherwise approved by the engineer.**

Replacement of pavement markings, stripping, and traffic loops shall be considered incidental to surface restoration and **no** separate measurement or payment will be made for this work.

Removal of temporary pavement will be considered incidental to permanent paving and no separate measurement or payment will be made for this work.

Attachments

- Attendee list for the mandatory Pre-bid Conference.
- 2016 PMUF Projects Map

End revisions for Addendum No. 1

Addendum No. 1 is hereby made a part of the contract documents, and its terms and conditions are fully binding on the contract document holder. He/she shall acknowledge receipt of Addendum No. 1 by signing in the space provided below and attaching it to his/her proposal.

This Addendum No. 1 must be acknowledged by filling out "1", the **date** and **signed initials** on the Bid Forms, proposal page where it states: **Acknowledgement of Receipt of Addenda.**

CITY OF OREGON CITY



Dennis Kessler, RH2 Engineering
Issued May 23, 2016

15th Street Waterline Replacement Project Pre-Bid Meeting

5/19/2016

Name	Company	email
* Nick Hill	Emery & Sons	bids@emeryandsons.com
* Eric Bongen	Cascade Shoring	eric@cascade.shoring.com
* Mike Garcia	Pacific Rim Const.	MIKE@PACIFICRIMCONST.COM
* Dyle Howard	earthworks excavation	dyle@earthworks-us.com
* Tressie Stockdale	PCR Inc	estimating@pcr-inc.net
* Wilhelm Egloff	MOORE Excavation	BIOS@themeigroup.com
* Derek Osterholm	D:TEXCAVATION, INC.	derek@dtextavation.com
* Gerald Spraul	JERRY CEM EXCAVATION	jerry@cemexcavation.com
* Brennon Aho	Trench Line Excavation, Inc	brennonaho@gmail.com
* Tom Rasch	OREGON Underground Inc	tom@oregonunderground.com
* DUANE NELSON	CIVILWORKS NW, INC	DNELSON@CIVILWORKSNW.COM
*		
*		
*		
*		
*		
*		
*		
*		
*		
*		
*		
*		
*		


City of Oregon City

GEOGRAPHIC INFORMATION SYSTEM


2016 Street Projects

Printed March 10, 2016

- Rehabilitation
- Slurry Seal
- Micro Seal
- Chip Seal
- - - City Limits
- - - Urban Growth Boundary

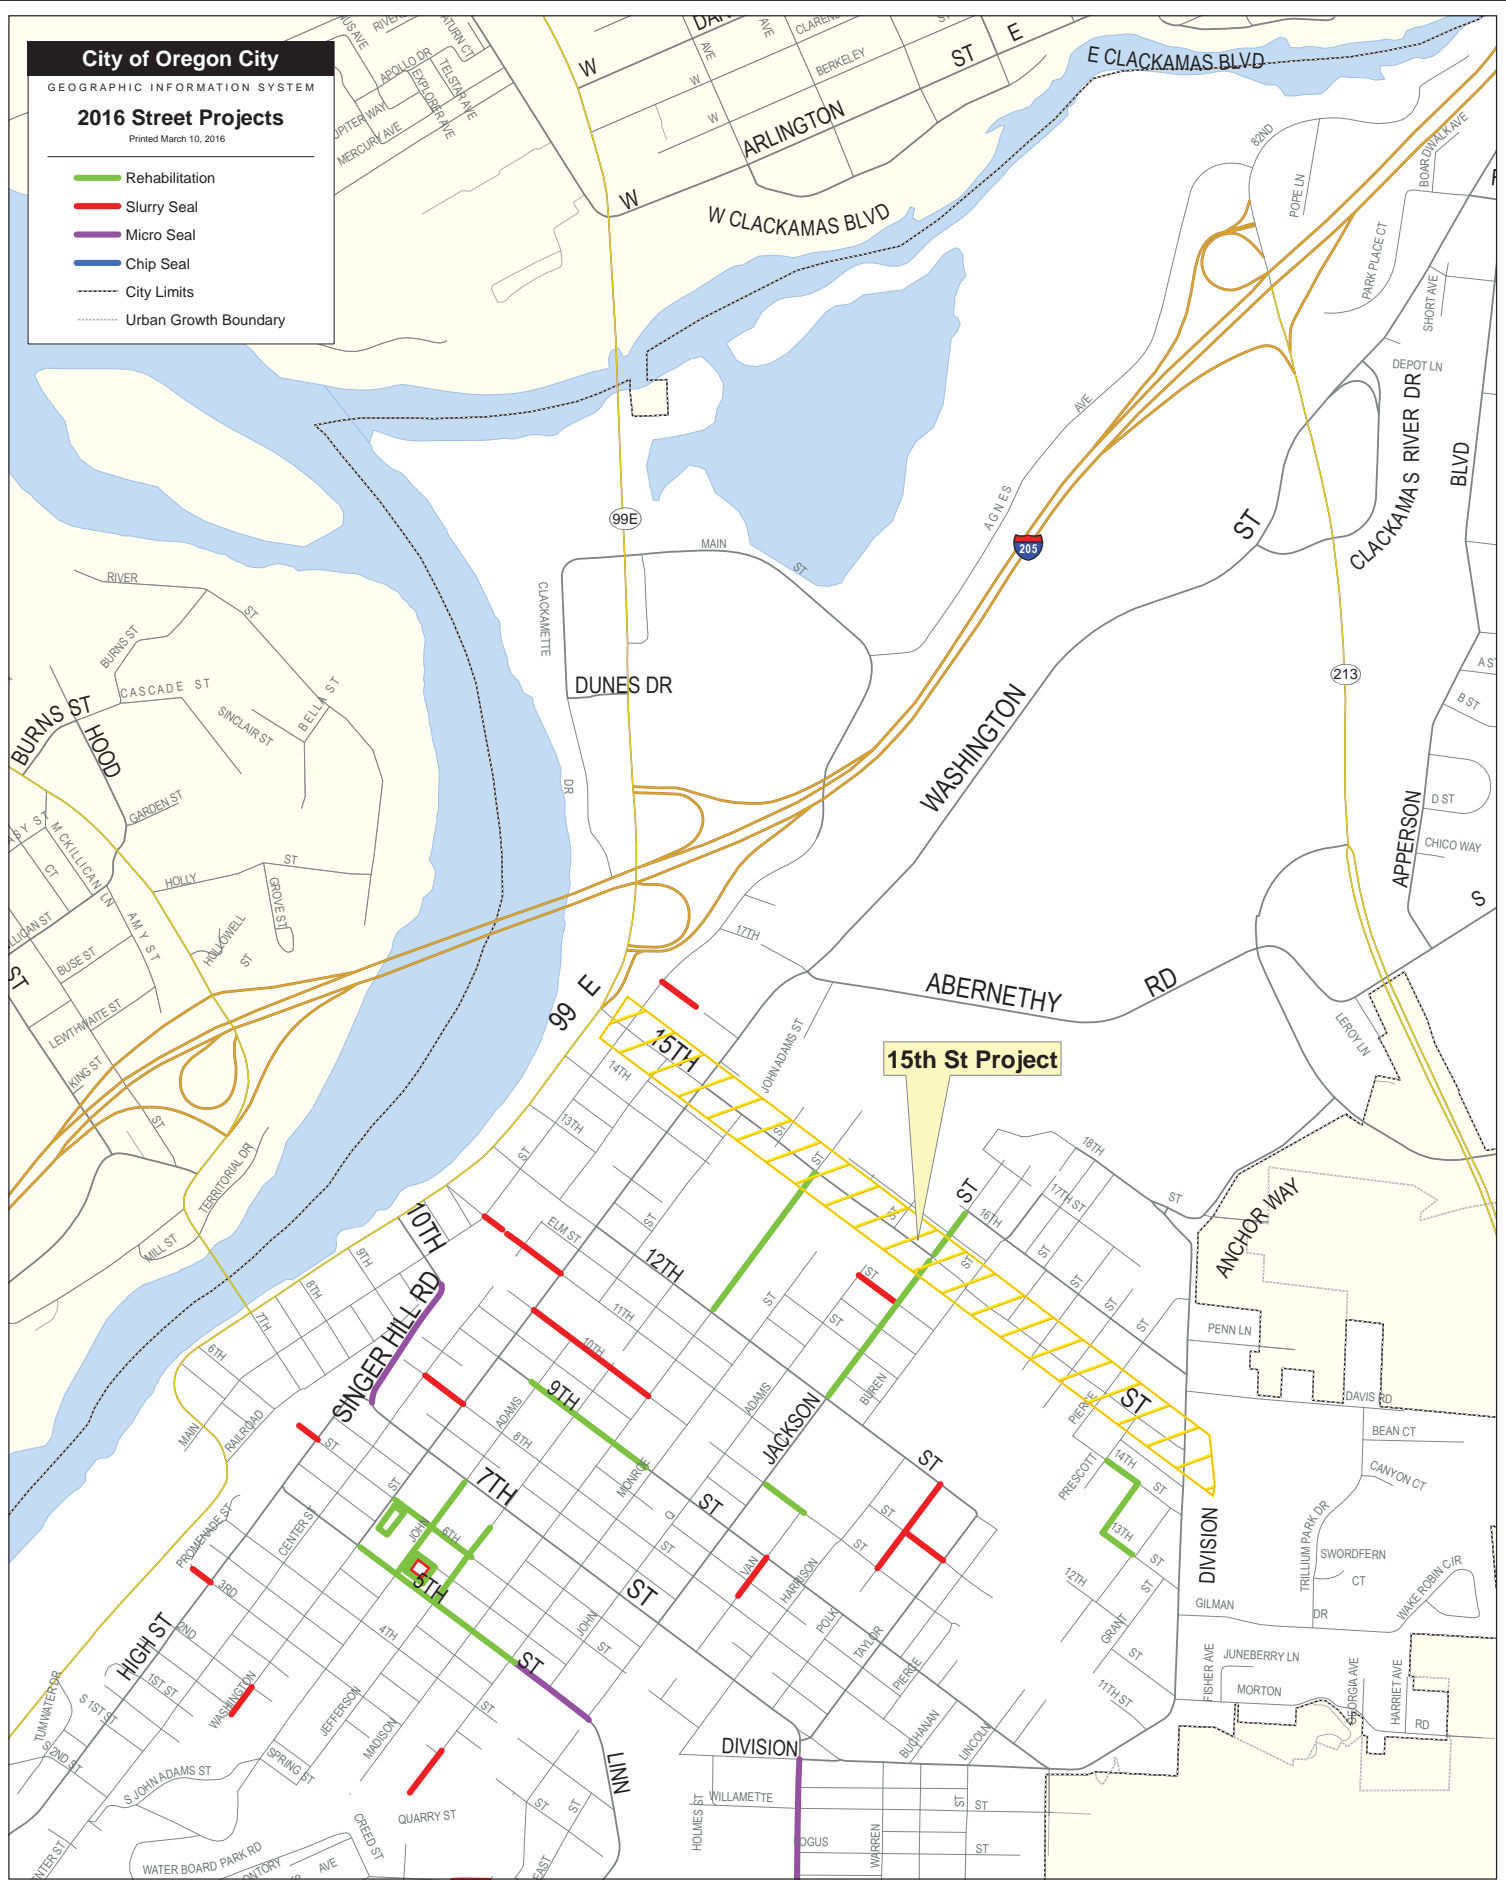

The City of Oregon City makes no representations, express or implied, as to the accuracy, completeness and timeliness of the information displayed. This map is not suitable for legal, engineering, or surveying purposes. Notification of any errors is appreciated.



Please recycle with colored office grade paper.

City of Oregon City
 P.O. Box 3040
 625 Center St
 Oregon City, OR 97045
 503-657-0891 phone
 503-657-6629 fax
 www.orcity.org



Plot date: May 16, 2016
 Plot name: 15th St Water Project - 2016 PM&F Projects Map - 15x48P-20160516.ppt
 Map name: 15th St Water Project - 2016 PM&F Projects Map - 15x48P.mxd